


Geroluxe Code

**ZO-LR001-3K**

**Technical information**

Dimension(mm)	Cut Out(mm)	Power	Luminous flux	Finishing Color
Φ100 x 75	Φ90	9W	720lm	
Φ100 x 75	Φ90	12W	960lm	
Φ110 x 80	Φ100	15W	1200lm	
Φ110 x 80	Φ100	20W	1600lm	
Φ135 x 96	Φ125	20W	1600lm	
Φ135 x 96	Φ125	30W	2500lm	
Φ170 x 112	Φ150	30W	2500lm	
Φ170 x 112	Φ150	40W	3400lm	
Φ215 x 135	Φ200	40W	3400lm	
Φ215 x 135	Φ200	50W	4200lm	

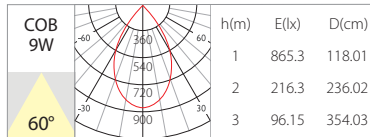

More Decorative reflector available :




Matt silver

Glossy silver

Black

Golden

**Color Temp.**      **Beam Angle**


Deep anti glare design with UGR&lt;10

**Product Features:**

- ADC12 die-cast aluminum housing, ensure excellent heat dissipation
- Famous branded optic with 24° and 60° meet diverse applications need
- Various decorative anti-glare ring optional; UGR<19
- Product serialization with various wattage available from 9W ~50W
- IP20 and IP44 optional meet diverse applications need
- CCT tunable and dimmable, suitable for kinds of smart system
- Long lifespan 35,000 hours, 5 years warranty

**Structure and characteristics**
**1 Optics**

- International famous branded reflector
- Various beam angles
- Precise and uniform light distribution
- Anti Glare design
- Various decorative reflector available

**3 Driver**

- External constant current driver
- Conforming to LVD and EMC

**2 Light source**

- International famous branded COB chip
- High CRI and lumen output, Good color saturation and fidelity

**4 Lamp body**

- High quality integrated die-cast design heatsink
- Excellent appearance and heat dissipation

