

## Geroluxe Code




### Technical Specifications

Dimension(mm)	Power	Luminous flux	Finishing
480 x 73mm	48W	3010lm	Black/White

### Product Features


**RIMLESS DESIGN:** Thin, LED panel with no visible frame or rim for a modern and sleek appearance. **EASY INSTALLATION:** The lightweight panel installs directly to the ceiling or wall with included mounting bracket - no false ceiling required. **DURABLE ACRYLIC:** Shatter-resistant acrylic panel protected by a matte finish coating provides even light distribution and years of use. **LOW PROFILE LIGHTING:** Fits in a compact space and perfect for both commercial and residential spaces. **EYE COMFORT:** Emits a calm and soothing light that won't strain the eyes. **ENERGY EFFICIENT:** LED diode uses very little power for significant light output and long lifespan of over 20,000 hours.

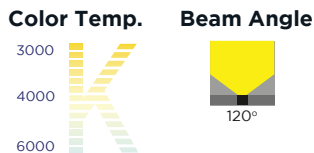

### Descriptions

Voltage: 220-240 V/AC  
 Power: 48W  
 Lumens: 3010 lm  
 Indoor use: IP33  
 CRI I>80  
 CCT system: warm light (3000K), neutral light (4000K) or cold light (6500K).  
 Easy installation  
 Material : Plastic  
 Style : Modern  
 Operating Voltage : 180V - 265V  
 Input Voltage : 220V - 240V AC  
 Lumen : 70.00 lm/w  
 Sigle CCT : 3CCT  
 LED Style : 2835

### Technical Drawing

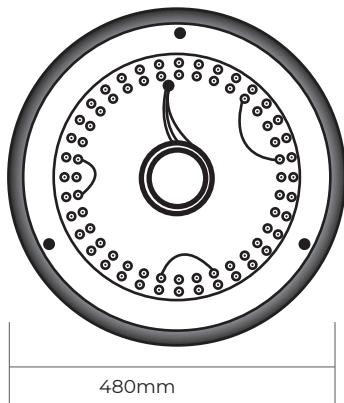

### Original Light

