

Geroluxe Code

**ZO-CL009**



**Technical Specifications**

Dimension(mm)	Power	Input	Luminous Flux	Finishing
108 x 40 mm	9W	AC220-240V	990lm	White/Black
138 x 42 mm	12W	AC220-240V	1320lm	White/Black
178 x 44 mm	18W	AC220-240V	1980lm	White/Black
230 x 45 mm	24W	AC220-240V	2640lm	White/Black
295 x 48 mm	30W	AC220-240V	3300lm	White/Black

**Color Temp. Beam Angle**



Warm White 3000K    Neutral White 4000K    Cold White 6500K

**Product Features**

Rust and UV resistant coatings have maintained their fashionable appearance for many years


All installation accessories included, follow our installation guide for quick and easy setup in minutes. It can also be quickly installed by one person.

High quality metal and acrylic finish, fade resistant, easy to clean, better light transmission and heat dissipation. LED ceiling lighting will fit your ceiling perfectly

This lamp provides brighter lighting and a wider lighting range than other similar lamps on the market.

Useful life : 36.000h L70B30  
Warranty : 3 Years

**Technical Drawing**

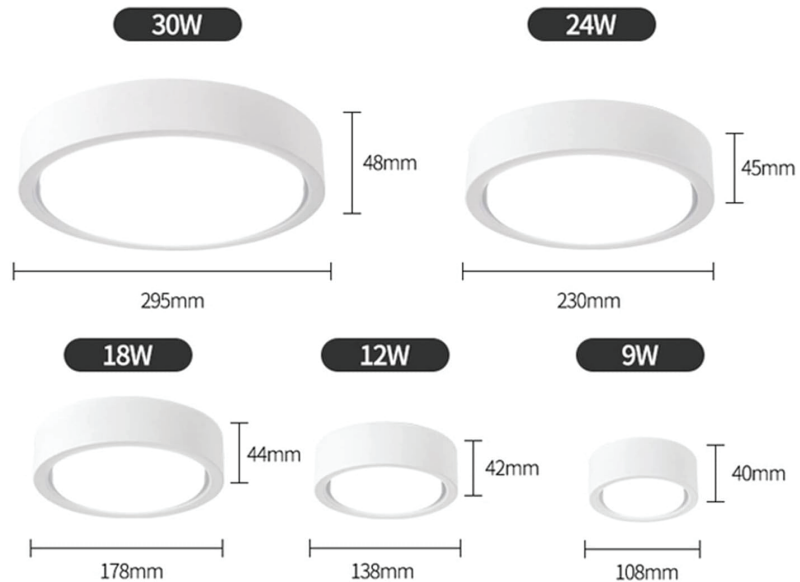

- CE
- ⏚
- CRI >80
- F
- 960°C
- IP44
- ✓ RoHS
- IK08
- SMD