




### Geroluxe Code




#### Color Temp.



#### Beam Angle

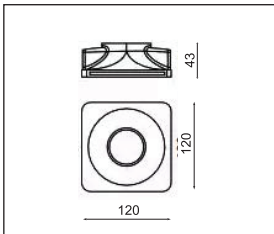

120-120-43mm

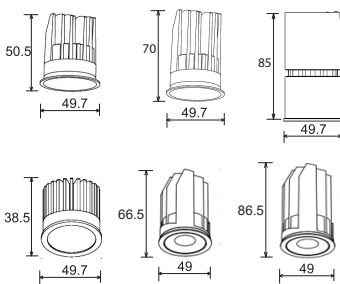



Available Accessories

#### Technical information

Dimension(mm)	Power	Voltage	Finishing Color
120-120-43mm	3W	220-240V	Black / White / Silver

Simple and easy appearance, in line with contemporary aesthetic concept. Ideal choices of size and design, this range is suitable for every wall. The product has the structure and appearance design patent. can be easily installed in any type of space, to create amazing light effects.

High Lumen Efficacy 115 lm/W - UGR<19  
 Body - Die cast aluminum housing with solvent free powder coating  
 Reflector - Anodized aluminum  
 Diffuser -polycarbonate pattern lens  
 Glowing Wire Test - 850°  
 Temperature - of=20 °C ~ of max=50

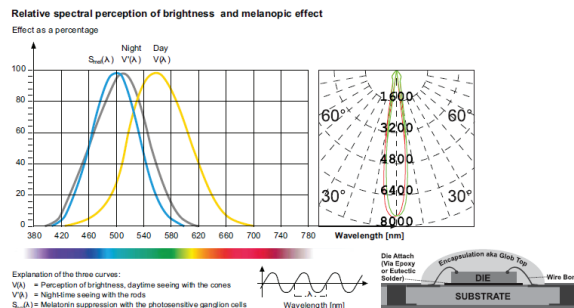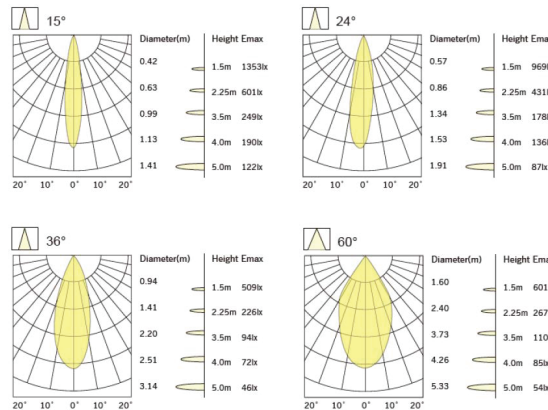

- CE
- UL
- CRI >80
- CRI >90
- RoHS
- IP20
- IK08
- COB

LED life time			Operating time 1.000 h									
Lamp Lumen Maintenance Factor	Lamp Survival Factor		10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.80
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99

