





## Geroluxe Code




### Color Temp.



### Beam Angle



Relative spectral perception of brightness and melanopic effect  
Effect as a percentage



### Technical information

Dimension(mm)	Cut Out(mm)	Power	Luminous flux	Finishing Color
Φ100 x 65	Φ80	18W	720lm	Black / White / Silver

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

High Lumen Efficacy 115 lm/W - UGR<19

Body - Die cast aluminum housing with solvent free powder coating



Diffuser -polycarbonate pattern lens

Glowing Wire Test - 850°

Temperature - of=20 °C ~ of max=50 °C



### Available Accessories

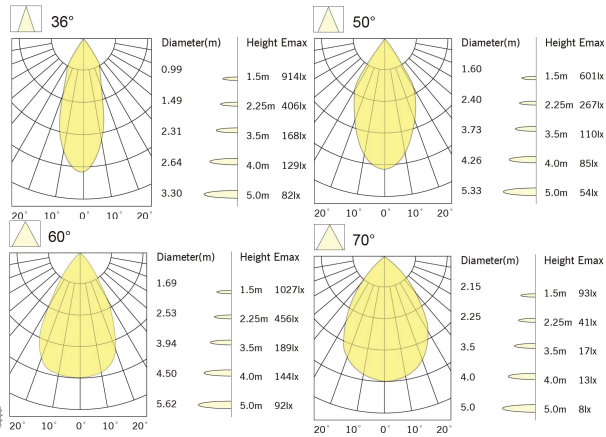

# TRIDONIC



LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor		1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



+++ 01 +++

Office :  
Absher Business Centre,  
Garhoud Street, Garhoud,  
Deira, Dubai, UAE

Warehouse :  
Umm Ramool, 40 3D Street,  
R.No.001, Opp Bin Thani Cargo,  
Dubai, UAE.

Contact :  
+971 4 225 3319  
info@alzomorod.com  
www.alzomorod.com

