


### Geroluxe Code




#### Technical information

Dimension(mm)	Power	Voltage	Finishing Color
85-85-35mm	1W	220-240V	Black / White / Silver



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare.

High Lumen Efficacy 115 lm/W - UGR<19  
 Body - Die cast aluminum housing with solvent free powder coating Reflector - Anodized aluminum  
 Diffuser -polycarbonate pattern lens  
 Glowing Wire Test - 850°  
 Temperature - of=20 °C ~ of max=50 °C


#### Color Temp.



#### Beam Angle

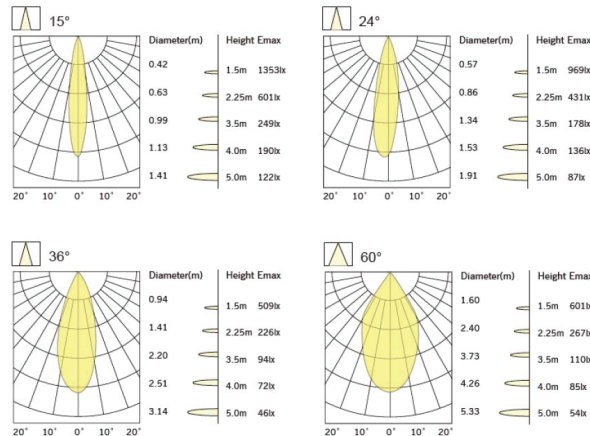

#### Relative spectral perception of brightness and melanopic effect

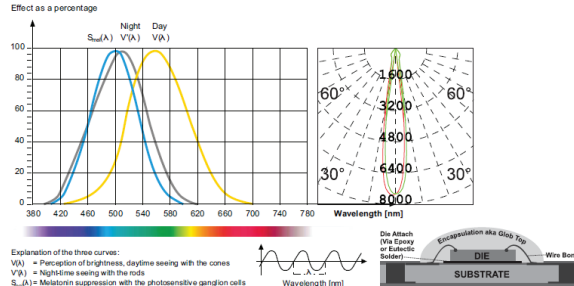

- CE
- UL
- CRI >80
- CRI >90
- RoHS
- IP65
- IK08
- COB

LED life time			Operating time 1,000 h									
Lamp Lumen Maintenance Factor	1	10	20	30	40	50	60	70	80	90	100	
Lamp Survival Factor	1	1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50,000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99
L80	100,000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

Office :  
 Absher Business Centre,  
 Garhoud Street, Garhoud,  
 Deira, Dubai, UAE

Warehouse :  
 Umm Ramool, 40 3D Street,  
 R.No.001, Opp Bin Thani Cargo,  
 Dubai, UAE.

Contact :  
 +971 4 225 3319  
 info@alzumorod.com  
 www.alzumorod.com

